

Mask-off

APPLY WITH

block
paintbrush

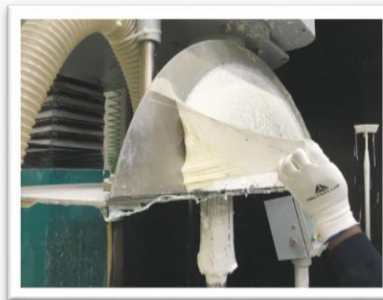
Paint-on temporary and peelable protection.
For inside use only.



Apply MASK-OFF



Remove Mask-Off film

**DESCRIPTION**

MASK-OFF is a pink gel, which dries to a peelable film that serves to protect the substrate from damages and contaminations. MASK-OFF is applied with a blockbrush and is removed in one go when the protection is no longer needed.

WHERE TO USE

- » Protection of shower trays, bathtubs, kitchenparts, during construction works.
- » Protection of machinery, lab equipment and tools in factories.

Attention:

- » MASK-OFF is not UV/sun resistant.
- » MASK-OFF is not waterresistant.

ADVANTAGES

- » Easy and quick application on a variety of substrates.
- » Removal without leaving residue.
- » Solvent free.

APPLICATIONPrior to starting the application:

- » Substrate is cohesive and clean and free of rust when applied on metal.
- » Substrate temperature during application: between +5°C and +25°C.
- » Apply a test on the substrate to be protected, to ensure compatibility.

Application:

- » Apply with a blockbrush. Stirr before use. Do not add water or solvents.
- » Minimum consumption: 0,5 kg/m² (~500 micron).
- » Depending conditions and applied thickness, drying time is minimum 1 hour.
- » Cleaning tools: after use with water;
- » When the MASK-OFF protection is no longer needed, remove in one go, but not later than 4 months after it was applied.

CARACTERISTICS

- » View: pink gel; peelable film after drying.
- » Minimum consumption: 0,5 kg/m² (~500 micron), up to 1 kg/m² depending substrate.
- » Density: +/- 0,95 kg / liter.
- » Elasticity: > 1000%
- » Service temperature (after drying): -20°C to +40°C

Mask-off

APPLY WITH

block
paintbrush



TESTED SUBSTRATEES

Substrate	Compatibility (*)
Glass	yes
Coated aluminium	yes
Uncoated aluminium	yes
Coated wood	Depending type of paint
Uncoated wood	No
Inox	yes
Pvc	yes
Uncoated steel (warm or cold process)	yes
Concrete, brickwork, masonry, gypsum, composites.....	yes
Ceramic (floors, baths,...)	yes
Sanitary pvc	yes
Sanitary acrylic, plexiglass	yes
Copper, zinc	No (discoloration)
Plastic	yes
Other coatings	Depending type of coating

*Note *: although intensively tested, it is requested to perform a small test area prior to using Mask-Off.*

STORAGE

Storage: 5 – 20 °C; store out of direct sunlight. Use within 6 months from date of production (unopened and original packaging).

PACKAGING

4 kg pails ; pallet : 96 x 4 kg

SAFETY

Consult SDS sheet before use. Keep out of reach of children.

EXTRA

HEVADEX cannot be held liable for damages on substrates protected with MASK-OFF.

DATE OF THIS EDITION: 19/09/2019

Our general conditions of sale apply. This document does not have a contractual value. This technical data sheet replaces and cancels the previous edition. The information given in this sheet has the purpose to inform and advice you. At every moment, this sheet can be adapted because of technical evolution. All information is given in good faith and without any warranty. The application, use and processing of these products are beyond our control and therefore the entire responsibility of the user/client/applicator. The user of the product must test the product's suitability and apply for the intended purpose. Established liability if any for any reason is always limited to the value of the goods supplied by HEVADEX bvba. The products and systems are manufactured under total quality management. HEVADEX bvba reserves the right to change the properties of its products. Users must always refer to the most recent issue of the local Product Data Sheet, copies of which will be supplied on request.